Colo Science
Laboratory & Scientific Equipment

COLO.SCIENCE · TECHNICAL SPECIFICATION

PORTABLE 45/0 SPECTROPHOTOMETER

CS4560

Portable Spectrophotometer · 45/0 · LED + UV · 400–700 nm · Ø8 + Ø4 mm · 3.5" touch screen


CS4560 Portable Spectrophotometer measures colour and colour difference the way the eye sees it — with 45° ring illumination and 0° viewing, the geometry for visual colour assessment of paints, inks, printed matter, plastics, textiles and coated surfaces. Concave grating and a 256-element dual-array CMOS sensor give stable spectral data in a 600 g instrument with a 3.5" touch screen. Top accuracy of the series: two switchable apertures, LED and UV light sources for fluorescent samples, traffic-sign measurement and Bluetooth.

45/0 · LED + UV · 400–700 nm · Ø8 + Ø4 mm · ΔE*ab ≤ 0.03 repeatability · 3.5" touch screen · USB, Bluetooth · Traffic signs

Document type: **Technical Specification Sheet**
Product: **CS4560 Portable Spectrophotometer**
Format: Print layout · A4 landscape

CS4560 product page · Spectroscopy & Color — overview · Spectroscopy & Color catalogue · Request quote

GEOMETRY	APERTURE
45/0 ring	Ø8 + Ø4 mm
REPEATABILITY	**INTER-INSTRUMENT**
ΔE*ab ≤ 0.03	ΔE*ab ≤ 0.15

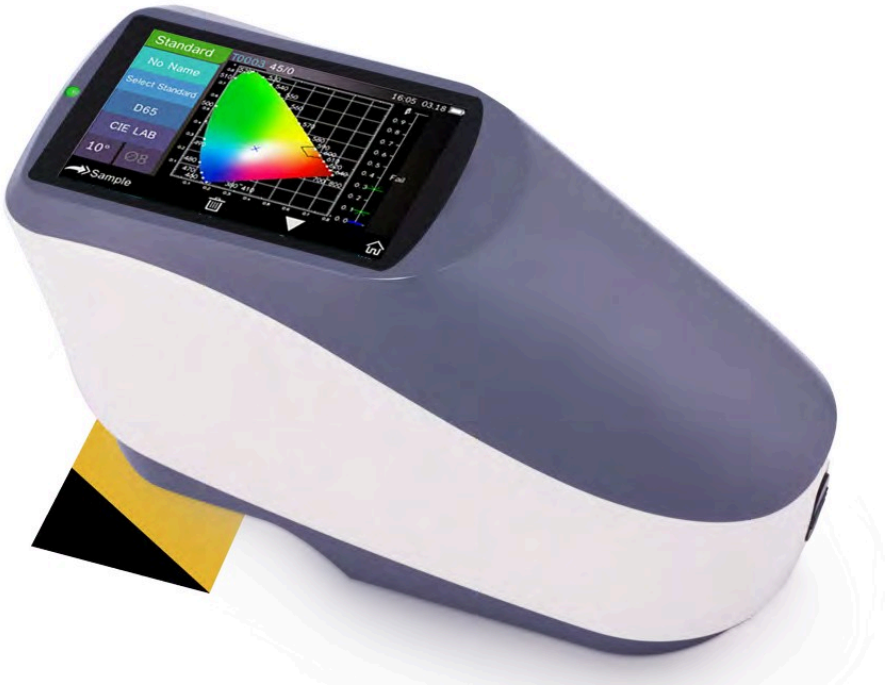

CS4560 · portable 45/0 spectrophotometer with touch screen

MODEL	ADDRESS / HQ	CONTACT
CS4560	Polje ob Sotli 4 SI-3255, Slovenia	sales@colo.si +386 70 713 437

CS4560 · product overview

Portable 45/0 colour measurement for laboratory, production and goods receipt

CORE TECHNOLOGY

45/0 geometry with ring illumination — matches visual assessment; the ring makes the result independent of the orientation of textured or striped samples.

Combined full-spectrum LED light source and UV light source (UV included / UV excluded) — UV included or excluded for fluorescent and optically brightened samples.

Concave grating and 256-element dual-array CMOS sensor, 400–700 nm in 10 nm steps.

Aperture Ø8 + Ø4 mm — switchable for large and small samples.


Traffic signs and reflective films: brightness factor and chromaticity coordinates, standard traffic-sign colours and user-defined polygon tolerances.

3.5" capacitive touch screen with colour values, ΔE, pass/fail and spectral curve.


1 000 standards, 30 000 samples stored in the instrument; single or averaged measurement (2–99).

USB, Bluetooth to the PC software for standards, tolerances, trends and reports.


PRODUCT HIGHLIGHTS



Results on the instrument
Colour values, ΔE and pass/fail against stored standards on the 3.5" touch screen.



Spectral curve
Reflectance curve 400–700 nm for standard and sample, for colour matching and analysis.



Traffic-sign colours
Chromaticity diagram with polygon tolerance and brightness factor — pass/fail in one step.



PC software
Standards, tolerances, trends and reports on the PC; data transfer by USB, Bluetooth.

APPLICATIONS


Paints & inks


Plastics


Leather & textiles


Automotive parts


Food


Laboratories & QC

LIGHT SOURCE	COLOUR SPACES	MEASURING TIME	WEIGHT
LED + UV	CIE Lab, XYZ, LCh ...	≈ 1.5 s	≈ 600 g · Li-ion battery

CS4560 product page | Spectroscopy & Color — overview | Spectroscopy & Color catalogue | Request quote

CS4560 · technical parameters

45/0 · LED + UV · 400–700 nm · Ø8 + Ø4 mm

TECHNICAL PARAMETERS

Optical geometry	45/0 (45° ring illumination, 0° vertical viewing)
Standards	CIE No.15, ISO 7724-1, ASTM E1164, DIN 5033 Teil 7
Light source	Combined full-spectrum LED light source and UV light source (UV included / UV excluded)
Spectral separation	Concave grating
Sensor	CMOS image sensor, dual array, 256 elements
Wavelength range	400–700 nm
Wavelength pitch	10 nm
Half bandwidth	10 nm
Reflectance range	0–200 %
Measuring aperture	Two, switchable: MAV Ø8 mm measuring / Ø10 mm illumination; SAV Ø4 mm / Ø5 mm
Colour spaces	CIE Lab, XYZ, Yxy, LCh, CIE LUV, Hunter Lab, βxy
Colour difference	ΔE*ab, ΔE*uv, ΔE*94, ΔE*cmc (2:1), ΔE*cmc (1:1), ΔE*00, ΔE (Hunter)
Colorimetric indices	WI (ASTM E313, CIE/ISO, AATCC, Hunter), YI (ASTM D1925, ASTM E313), metamerism index MI, staining fastness, colour fastness, colour strength, opacity
Traffic signs	Brightness factor and chromaticity coordinates of traffic signs, road markings and reflective films; built-in standard traffic-sign colours with user-defined polygon tolerances

Observer	2° and 10°
Illuminants	D65, A, C, D50, D55, D75, F1, F2 (CWF), F3, F4, F5, F6, F7 (DLF), F8, F9, F10 (TPL5), F11 (TL84), F12 (TL83/U30)
Displayed data	Spectral curve and values, chromaticity values, colour difference values and graph, pass/fail, colour assessment
Measuring time	approx. 1.5 s
Repeatability	MAV: ΔE*ab ≤ 0.03; spectral reflectance s.d. ≤ 0.08 % (400–700 nm: 0.18 %) (white tile, 30 measurements at 5 s intervals after white calibration)
Inter-instrument agreement	ΔE*ab ≤ 0.15 (average of 12 BCRA Series II tiles)
Measurement mode	Single measurement, average of 2–99 measurements
Display	3.5" TFT colour LCD, capacitive touch screen
Interfaces	USB, Bluetooth
Data storage	1 000 standards, 30 000 samples
Power supply	Li-ion battery, 5 000 measurements within 8 hours
Light source life	5 years, > 3 million measurements
Dimensions (L × W × H)	184 × 77 × 105 mm
Weight	approx. 600 g
Environment	Operation 0–40 °C, 0–85 % RH (non-condensing), altitude < 2000 m; storage −20–50 °C

CS4560 · accessories and series


Standard delivery, optional components and the CS45 series at a glance

ACCESSORIES



White and black calibration standard

STANDARD



PC software

STANDARD



Powder test box

OPTIONAL



Micro printer

OPTIONAL

Standard delivery

Instrument	CS4560 portable spectrophotometer
Apertures	Ø8 mm and Ø4 mm, switchable
Calibration	White and black calibration standard
Care	Dust cover
Operation	Power adapter, built-in Li-ion battery, USB cable, user guide
Software	PC software (download)

Optional

Micro printer	Prints results directly from the instrument
Powder test box	For powders, granules and pastes
Universal test component	For samples that need a fixed measuring position
Locating plate	For repeatable positioning on the sample

CS45 series — which model?


Model	CS4580	CS4560	CS4510
Light source	LED + UV	**LED + UV**	LED
Apertures	Ø20 mm	**Ø8 + Ø4 mm**	Ø8, Ø4 or Ø2 mm
Traffic signs	yes	**yes**	—
Repeatability ΔE*ab	0.04	**0.03**	0.05
Inter-instrument ΔE*ab	0.2	**0.15**	0.2
Standards / samples	1 000 / 30 000	**1 000 / 30 000**	500 / 20 000
Connection	USB + Bluetooth	**USB + Bluetooth**	USB

All models: 45/0 ring illumination, concave grating, 400–700 nm, 3.5" touch screen, approx. 1.5 s, 184 × 77 × 105 mm, approx. 600 g.

CS4560 · configuration and support

Ordering information, configuration checklist and contact

SOFTWARE, CONFIGURATION AND SUPPORT

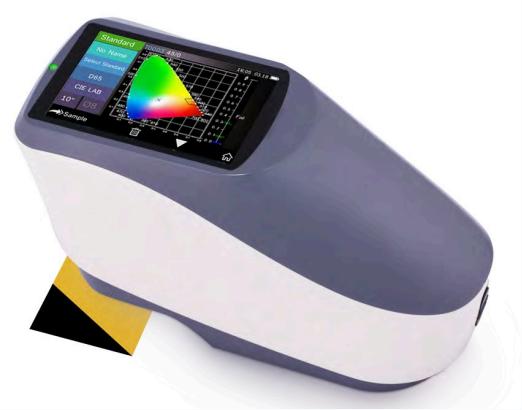

CS4560 · portable 45/0 measurement on signs, films, panels, prints and plastics

Ordering information

Model	CS4560 Portable Spectrophotometer
Measurement	45/0, combined full-spectrum LED light source and UV light source (UV included / UV excluded)
Aperture	Two, switchable: MAV Ø8 mm measuring / Ø10 mm illumination; SAV Ø4 mm / Ø5 mm
Connection	USB, Bluetooth

Configuration checklist

Samples: size of the smallest area to measure, surface (flat, textured, striped, reflective film), powders or granules.

Colour data: colour space, ΔE formula, illuminant and observer you report; traffic-sign colour standard and tolerances.

Use: laboratory, production line, goods receipt or field; stand-alone or with PC software.

Existing data: reference standards or values to be transferred.

MANUFACTURER AND SUPPORT

COLO Lab Experts
Polje ob Sotli 4, SI-3255, Slovenia

Selection guidance: send your sample type and the colour values you report — we confirm the model, accessories and delivery time with the quotation.

QUICK CONTACT

colo.si
sales@colo.si
+386 70 713 437

COLO.SCIENCE · COLOUR MEASUREMENT SUPPORT

45/0 or d/8 — not sure which fits your samples?

Send your sample type, the smallest area to measure and the colour data you report — we propose the model and confirm it with the quotation.

Request quotation | sales@colo.si | +386 70 713 437

Specifications are subject to change without notice. Values refer to standard laboratory conditions.